


Telescoping Fiberglass Rods

TELESCOPING ROD WIRE INSTALLATION TOOL

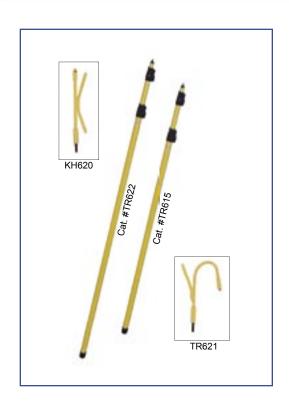

FEATURES

- Made from high strength, low weight non-conductive fiberglass.
- Ideal for pulling and stringing communications wire, alarm system wires, Romex, Cat 5, telephone and thermostat wire.
- Positive twist locks for greater locking strength.
- Heavy duty threaded steel end for attaching hooks.
- Can be used with K-Hook (supplied) or optional J-Hook.
- Made in USA

KENA CATALOG NO.	DESCRIPTION	WEIGHT (lbs./kg)
TR615	TELE-Rod™ Telescoping Fiberglass Rod (reach up to 15 ft.)	3.0 [1.36]
TR622	TELE-Rod™ Telescoping Fiberglass Rod (reach up to 20 ft.)	4.0 [1.81]
KH620	K-Hook for TR622 & TR615 (shown above)	0.5 [0.23]
TR621	J-Hook for TR622 & TR615 (shown above)	0.5 [0.23]
EP36	TELE-Rod™ Extender Pole, 1/4" X 3 ft.	0.1 [0.05]
KR113	TELE-Rod™ and Kena-Rod™ "V" Tip Pull Attachment	0.01 [0.004]

OTHER FIBERGLASS WIRE PULLING RODS

Kena-Rod™ 1/4" Rods • Kena-Rod II™ 3/16" Rods MOON-GLOW™ 3/16" & 1/4" Glow-in-the-Dark Rods

ORDER FROM YOUR AUTHORIZED KENA DISTRIBUTOR TODAY

www.kenaindustries.com



Kena Industries, Inc. COMMERCIAL DIVISION P.O. Box 30037 Clarksville, TN 37040-0001 Phone: (800) 553-3380

Email: sales@kenaindustries.com